

TOURING ITEMS[®]
TYPES

CHARGEV

J1772 CHARGER DOCK
WITH ANTI-THEFT LOCK




WP ITM. AC535379

Quick Start Guide

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

FEATURE OVERVIEW

1. Number Lock
2. J1772 EV Charger Dock

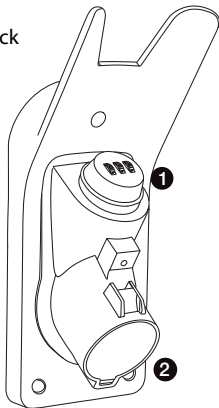

WARNING

IMPORTANT SAFETY INSTRUCTIONS

WARNING – When using this product, basic precautions should always be followed, including the following:


- Read all the instructions before using this product.
- This device should be supervised when used around children.
- To reduce the risk of injury, close supervision is necessary when the product is used near children. Children should not operate this device unless under strict supervision by a person responsible for their safety.
- Do not use this product if the enclosure or the charging dock is broken, cracked, open, or shows any other indication of damage.

CLEANING AND MAINTENANCE

- Always disconnect the charging adapter from the dock before cleaning or servicing.
- Clean the product with a damp cloth. Use only mild cleaning agents, no solvents or corrosive chemicals.

SAVE THESE INSTRUCTIONS

PACKAGE CONTENTS

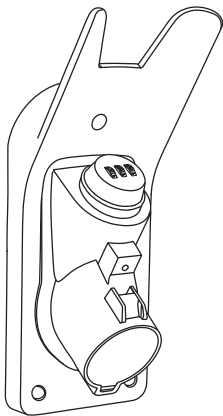

1 x J1772 EV Charger Dock With Lock




5 x Flat Head Screws



5 x Wall Anchors



1 x Split Pin




1 x Quick Start Guide




1 x Warranty Card

INSTALLING THE CHARGER DOCK

1. Use the charger dock to mark the three pilot hole locations. Drill the holes using a drill bit (not included) suitable for your wall.

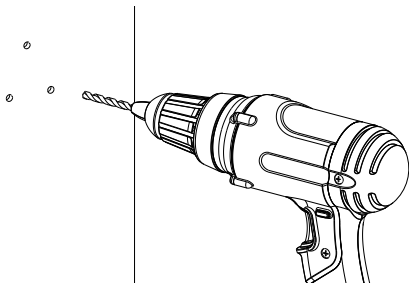


2. Mount the dock using the flat head screws and wall anchors.

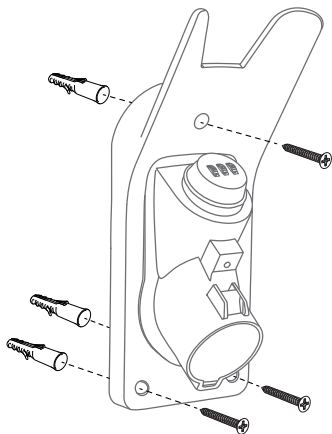


USING THE CHARGER DOCK

1. Insert your charging connector (not included) into the dock.

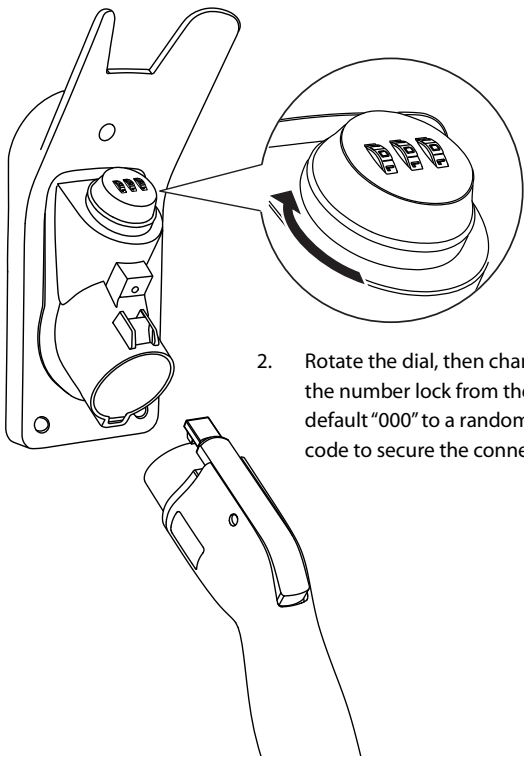


3. Wrap the cable around the back of the dock for a tidy setup.

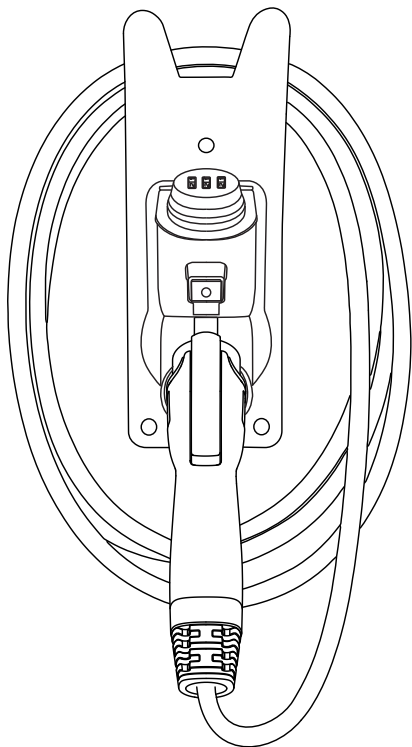


CHANGING THE PASSCODE

The default code is "000". To change it, please follow the steps below:

1. Set the number lock to "000" and rotate the dial to unlock.

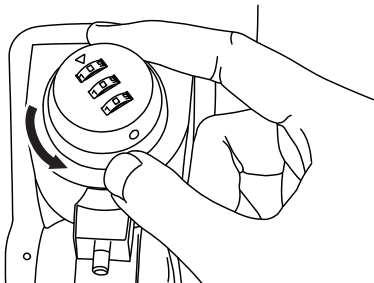

2. Insert the split pin into the small hole on the right. While holding the pin in place, set the number lock to your new code.

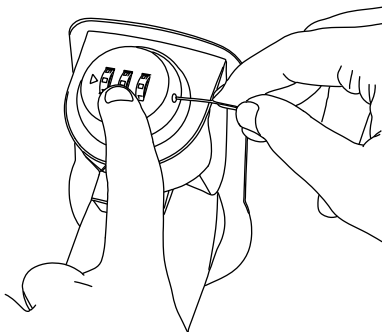

3. Remove the pin, then rotate the dial to confirm the new code has been set. The dial should rotate if the setup is successful.



A Horizon Brands Company
2975 Red Hill Ave., Ste. 100,
Costa Mesa, CA 92626
1.866.294.9244 | info@typesauto.com
©2026 TYPE S. All rights reserved.
www.typesauto.com

QIG-535379_V1