

TOURING ITEMS
TYPES

CHARGE_{EV}

NACS (TESLA) to J1772
CHARGING ADAPTER



WP ITM. AC535381

Quick Start Guide


IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

TECHNICAL SPECIFICATIONS

Voltage:	250VAC max.
Current:	50A max.
Charging Port:	SAE J1772 Standard
Connector Port:	NACS (Tesla)
Operating Temperature:	-22°F ~ 122°F (-30°C ~ 50°C)
Weight:	0.7lbs

FEATURE OVERVIEW

1. J1772 Charging Port
2. Release Button
3. NACS (Tesla) Connector Port
4. Security Lock

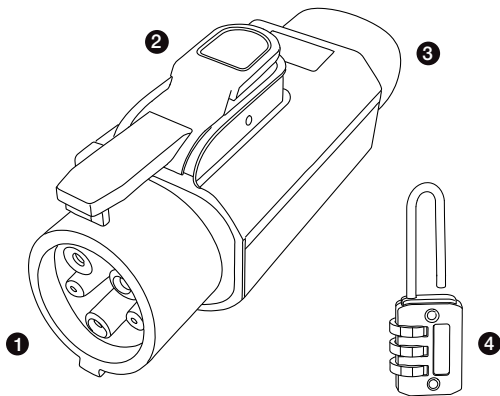

WARNING

INSTRUCTIONS PERTAINING TO RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

- Do not immerse the product in water.
- Do not operate the product in explosive atmospheres, such as in the presence of flammable liquid, gas or dust.
- Do not modify or disassemble this product.
- Do not operate the product outside its temperature range of -22°F to 122°F (-30°C to 50°C).
- Do not store in locations where the temperature may exceed 158°F (70°C).
- Dropping, hitting, or other excessive amounts of force to the charging adapter may damage the unit (external and internal), which may result in loss of operation, electrical fire, or cause other serious damage.
- Do not use any attachment that is not sold by the charging adapter manufacturer which may result in a risk of fire, electric shock, or injury to persons.
- Do not disassemble the charging adapter; take it to a qualified serviceperson when service or repair is required. Incorrect reassembly may result in a risk of fire or electric shock.
- To reduce the risk of electric shock, disconnect the charging adapter from power before attempting any instructed servicing.

IMPORTANT SAFETY INSTRUCTIONS

WARNING – When using this product, basic precautions should always be followed, including the following:


- Read all the instructions before using this product.
- This device should be supervised when used around children.
- To reduce the risk of injury, close supervision is necessary when the product is used near children. Children should not operate this device unless under strict supervision by a person responsible for their safety.
- Do not put fingers into the charging connector.
- Do not use this product if the enclosure or the charging connector is broken, cracked, open, or shows any other indication of damage.
- Have servicing performed by a qualified repair person using only identical replacement parts. This will ensure that the safety of the product is maintained.

CLEANING AND MAINTENANCE


- Always disconnect the charging adapter from power before cleaning or servicing.
- Unplug the charging adapter before cleaning it with a damp cloth. Use only mild cleaning agents, no solvents or corrosive chemicals.

SAVE THESE INSTRUCTIONS

PACKAGE CONTENTS




NACS (Tesla) To J1772 Adapter



Storage Bag



Security Lock




Quick Start Guide




Warranty Card

USING THE ADAPTER


1. Connect your charging connector (not included) to the adapter's NACS end.

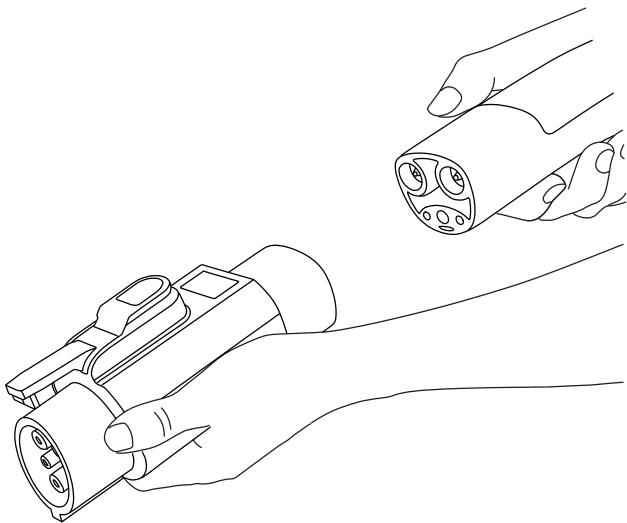

2. Plug the adapter into your vehicle's J1772 charging port until it clicks. Charging will begin automatically once properly connected. Lock the connector if needed.

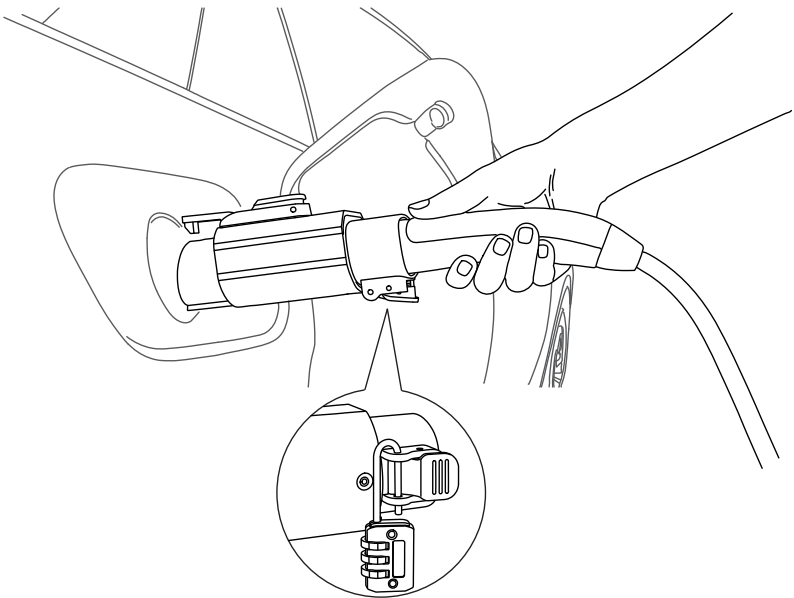

3. Once charging is complete, press the release button on the connector to disconnect.

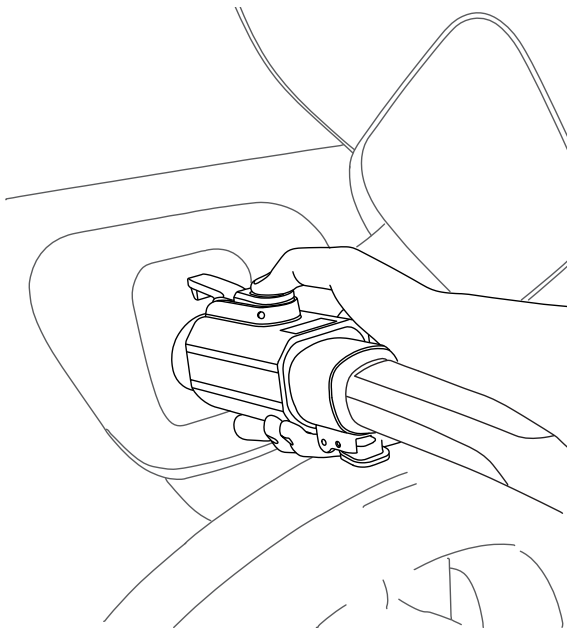

Tesla is registered trademarks of Tesla, Inc.
Horizon Brands has no affiliation with Tesla, Inc.



A Horizon Brands Company
2975 Red Hill Ave., Ste. 100,
Costa Mesa, CA 92626
1.866.294.9244 | info@typesauto.com
©2026 TYPE S. All rights reserved.
www.typesauto.com

QIG-535381_V1